Features

- 2:1 Wide Input Voltage Range
- 30 Watts Output Power
- 1.6kVDC Isolation
- Fixed Operating Frequency
- Six-Sided Continuous Shield
- International Safety Standard Approvals
- UL 1950 Component Recognized
- Standard 50.8 x40.6x10.2mm Package
- Efficiency to 90%

POWERLINE

DC/DC-Converter

RP30-S_DE Series

O-lti O-id	- (0) (0)					
Selection Guide				(4)	(F)	10
Part Number	Input	Output	Output Current	Input ⁽⁴⁾ Current	Efficiency ⁽⁵⁾	Capacitive ⁽⁶ Load max.
	Range VDC	Voltage VDC	mA	mA	%	μF
RP30-121.5SE	9-18	1.5	6000	1014	78	85800
RP30-121.8SE	9-18	1.8	6000	1169	81	65000
RP30-122.5SE	9-18	2.5	6000	1582	83	33000
RP30-123.3SE	9-18	3.3	6000	2037	85	19500
RP30-1205SE	9-18	5	6000	3012	87	10200
RP30-1212SE	9-18	12	2500	2976	88	3240
RP30-1215SE	9-18	15	2000	2976	88	1100
RP30-241.5SE	18-36	1.5	6000	493	80	85800
RP30-241.8SE	18-36	1.8	6000	580	82	65000
RP30-242.5SE	18-36	2.5	6000	780	84	33000
RP30-243.3SE	18-36	3.3	6000	1010	86	19500
RP30-2405SE	18-36	5	6000	1490	88	10200
RP30-2412SE	18-36	12	2500	1470	89	3300
RP30-2415SE	18-36	15	2000	1470	89	1100
RP30-481.5SE	36-75	1.5	6000	244	81	85800
RP30-481.8SE	36-75	1.8	6000	290	83	65000
RP30-482.5SE	36-75	2.5	6000	390	85	33000
RP30-483.3SE	36-75	3.3	6000	500	87	19500
RP30-4805SE	36-75	5	6000	740	89	10200
RP30-4812SE	36-75	12	2500	730	90	3300
RP30-4815SE	36-75	15	2000	730	90	1100
RP30-1212DE	9-18	±12	±1250	3012	87	±1020
RP30-1215DE	9-18	±15	±1000	3012	87	±675
RP30-2412DE	18-36	±12	±1250	1488	88	±1020
RP30-2415DE	18-36	±15	±1000	1488	88	±675
RP30-4812DE	36-75	±12	±1250	744	88	±1020
RP30-4815DE	36-75	±15	±1000	744	88	±675

30 Watt Single & Dual Output






Description


The E-Series of DC/DC Converters are fully certified to EN 60950: 2000. This makes them ideal for all Telecom and safety applications where approved isolation is required. They also meet UL 1950 and CSA 950 standards.

DC/DC-Converter

RP30-S_DE Series

Derating-Graph (Ambient Temperature)







Derating graphes are valid only for the shown part numbers. If you need detailed derating-information about a part-number not shown here please contact our technical customer service at info@recom-development.at

Typical Characteristics

RP30-4805SE



RP30-4805SE



Specifications (typical at nominal input and 25°C unless otherwise not	ed)	
Input Voltage Range	12V nominal input	9-18VDC
	24V nominal input	18-36VDC
	48V nominal input	36-75VDC
Under Voltage Lockout	12V input DC-DC ON	9VDC
	DC-DC OFF	8VDC
	24V input DC-DC ON	17.8VDC
	DC-DC OFF	16VDC
	48V input DC-DC ON	36VDC
	DC-DC OFF	33VDC
Input Filter (see note 1)		L-C Type
Input Voltage Variation dv/dt	(Complies with ETS300 132 part 4.4)	5V/ms max
Input Surge Voltage (100 ms max.)	12V Input	36VDC
	24V Input	50VDC
	48V Input	100VDC
Input Reflected Ripple (nominal Vin and full load)		30mAp-p
Start Up Time (nominal Vin and constant resistor load)		25ms typ.
Remote ON/OFF (see note 7)	DC-DC ON	Open or 3.5V < Vr < 12V
	DC-DC OFF	Short or $0V < Vr < 1.2V$
Remote OFF input current	Nominal input	2.5mA
		continued on next page

POWERLINE DC/DC-Converter

RP30-S_DE Series

Output Power		30W max.
Output Voltage Accuracy (full Load and nominal Vin)		±1%
Voltage Adjustability		±10%
Minimum Load	Single & Dual	0%
Line Regulation (LL-HL at full load)	Single	±0.2%
	Dual	±0.5%
Load Regulation (25% to 100% FL)	Single Dual	±0.5% ±1%
Cross Regulation (Note 9)	Duai	±1% ±5%
Ripple and Noise (20MHz bandwith)	Single 1.5, 1.8, 2.5, 3.3, 5V	50mVp-p
(Measured with a 1004pF/50V MLCC)	Single 12, 15V	75mVp-p
	Dual 5, 12, 15V	100mVp-p
Temperature Coefficient		±0.02%/°C, max.
Transient Response (25% load step change)		300µS
Over Voltage Protection	1.5, 1.8, 2.5, 3.3V	3.9V
Zener diode clamp (only single)	5V 12V	6.2V 15V
	15V	18V
Over Load Protection (% of full load at nominal Vin)		150% typ
Short Circuit Protection		Hiccup, automatic recovery
Efficiency		see "Selection Guide" table
Isolation Voltage		1.600VDC min.
Isolation Resistance		$10^9\Omega$ min.
Isolation Capacitance		1000pF max.
Operating Frequency		300kHz typ.
Approved to Safety Standards		UL 1950, EN60950
Operating Temperature Range	-	40°C to +85°C(with derating)
Maximum Case Temperature		+100°C
Storage Temperature Range		-55°C to +105°C
Over Temperature Protection		 115°C typ.
Thermal Impedance	Natural convection	10°C/Watt
	Natural convection with Heat Sink	8.24°C/Watt
Thermal Shock		MIL-STD-810D
Vibration	10-55Hz	, 2G, 30 Min. along X, Y and Z
Relative Humidity		5% to 95% RH
Case Material		Nickel-Coated copper
Base Material		Non-conductive black plastic
Potting Material		Epoxy (UL94-V0)
Conducted Emissions	EN55022	Class A
Radiated Emissions	EN55022	Class A
ESD Padiated Immunity	EN61000-4-2	Perf. Criteria 2 Perf. Criteria 2
Radiated Immunity Fast Transient	EN61000-4-3 EN61000-4-4	Perf. Criteria 2 Perf. Criteria 2
Surge	EN61000-4-4 EN61000-4-5	Perf. Criteria 2
Conducted Immunity	EN61000-4-6	Perf. Criteria 2

DC/DC-Converter

RP30-S_DE Series


Specifications (typical at nominal input and 25°C unless otherwise noted)	
Weight	48g
Dimensions	50.8 x 40.6 x 10.2mm
MTBF (see note 2)	1.535 x 10 ⁶ Hours


Notes:

- 1. An external filter capacitor is required for normal operation. The capacitor should be capable of handing 1A ripple current for 48V/24V models. RECOM suggest: Nippon chemi-con KMF series, 220μF/100V, ESR 90m Ω.
- 2. BELLCORE TR-NWT-000332. Case I: 50% Stress, Temperature at 40°C (Ground fixed and controlled environment).
- 3. Simulated source impedance of 12uH. 12uH inductor in series with +Vin.
- 4. Maximum value at nominal input voltage and full load of standard type.
- 5. Typical value at nominal input voltage and full load.
- 6. Test by minimum Vin and constant resistor load.
- 7. The ON/OFF control pin voltage is referenced to negative input
- 8. Heat sink is optional and P/N: 7G-0011A.
- 9. See application notes for EMI-filtering.

Package Style and Pinning (mm)



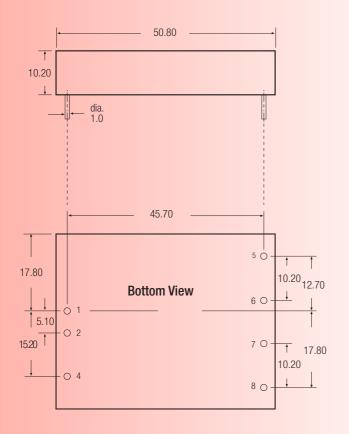



Pin Connections				
Pin #	Pin # Single			
1	+Vin	+Vin		
2	-Vin	-Vin		
4	CTRL	CTRL		
5	No Pin	+Vout		
6	+Vout	Com		
7	-Vout	-Vout		
8	Trim	Trim		

Pin Pitch Tolerance ±0.35 mm

External Output Trimming

Output can be externally trimmed by using the method shown below.

() for dual output trim

